

# TIMES SQUARE LIGHTING INC.

Times Square Lighting, Inc. 5 Holt Drive, Stony Point, NY 10980  
845-947-3034 FAX: 845-947-3047 www.tslight.com

## LAMP CHANGING INSTRUCTIONS FOR P20, P16 & MR16 FIXTURES - SAVE THESE INSTRUCTIONS

**CAUTION:** Read and understand these entire instructions before using this fixture.

**CAUTION:** Always wear protective eyewear and gloves when servicing this fixture for any reason.

**CAUTION:** Disconnect fixture from power supply before servicing fixture, or installing/removing lamp.

**CAUTION:** Allow fixture to sufficiently cool before servicing fixture, or installing/removing lamp.

**CAUTION:** Use only with a grounded power supply.

**CAUTION:** Except for the reflector, do not touch the inner glass bulb portion of MR16 lamps with your bare hands. Agents such as sodium, grease and oil can contaminate the glass wall, thereby risking rupture, lamp life or performance. If the bulb portion should become soiled, immediately and thoroughly wipe with a soft, clean, lint free cloth soaked in denatured alcohol (methylated spirits), then wipe dry with a soft, clean, lint free cloth.

**NOTE:** Removal of accessories for lamp changing is unnecessary. No tools required.

STEP 1: Disconnect power to the fixture. If the fixture is hot, allow it to cool before proceeding.

STEP 2: Unscrew the lampholder access knob approximately 1/2 turn. (See diagram 1)

STEP 3: Using the lampholder access knob, *gently and carefully* retract the lampholder by sliding it straight out of the rear of the fixture. (See diagram 2 for P20 & P16 Models or diagram 3 for MR16 Models)

STEP 4: For P20 & P16 Models, unscrew the lamp from the lampholder and discard. For MR16 Models, pull the lamp (with socket attached) up and out of the lampholder, then gently pull the socket off of the lamp and discard.

STEP 5: For P20 & P16 Models, install the new replacement lamp. For MR16 Models, gently attach the socket to the new lamp and install the lamp/socket combination back into the lampholder.

STEP 6: Reverse STEPS 1 - 3. **CAUTION!** Make certain that lampholder access knob is completely finger tight!

DIAGRAM 1

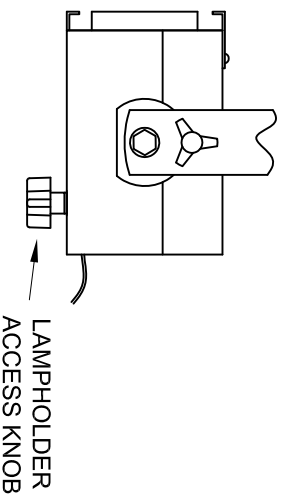


DIAGRAM 2

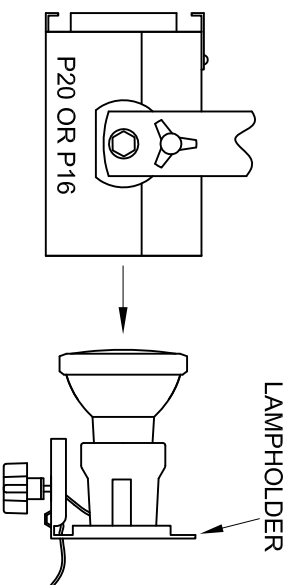


DIAGRAM 3

