

Manufactured in the USA - IBEW




W420 100-500W T3



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

The W420 is a wall wash unit ideal for general lighting in galleries, museums, exhibits, retail displays and theaters. Made of durable, lightweight construction this compact unit utilizes double-ended tungsten halogen lamps from 100 to 500-watts.

The W420 features an accessory holder that accepts louvers, barn-doors and filters. Tempered safety glass included. Available in black, white and silver finishes. Custom colors are available by request and at an additional charge.

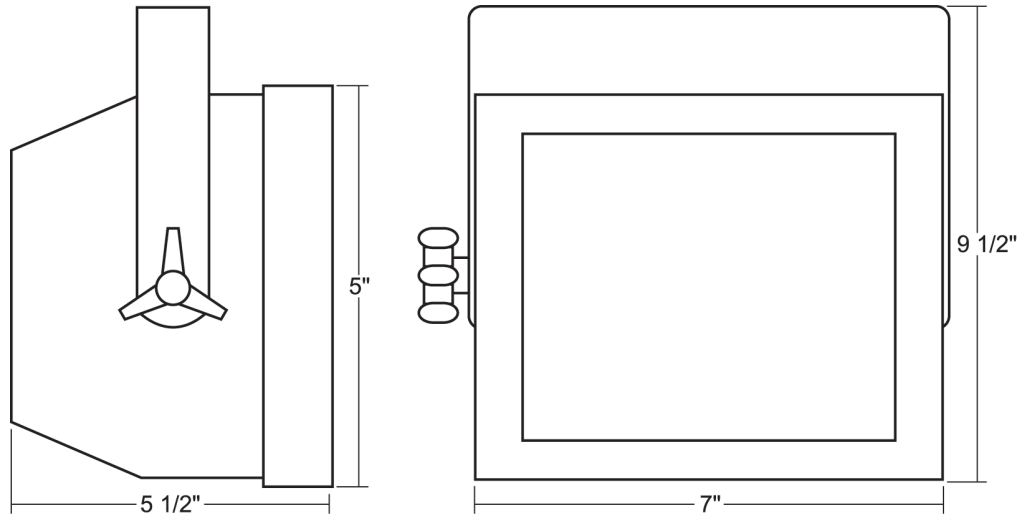

Features

- 120-volt
- Accepts double-ended lamps from 100 to 500-watts
- Numerous mounting options and accessories
- Weight: 2.8 lbs

Model	Finish	Mounting	Accessories
W420	B = Black W = White S = Silver CC = Custom Color	See Mounting Options	See Accessory Options

Example: W420-B-T1-BD19

W420-_____ - _____ - _____

*Specification sheets are subject to change without notice.

Lamp Types

Q100T3/CL

100W; 2000Hrs; 1600 Lumens; 16000 CBCP;
2850°K Color Temp

Q150T3/CL

150W; 1500Hrs; 2400 Lumens; 2250 CBCP;
2950°K Color Temp

Q200T3/CL

200W; 1500Hrs; 3460 Lumens; 3600 CBCP;
2925°K Color Temp

EHM

300W Clear; 2000Hrs; 6000 CBCP;
2950°K Color Temp

EHZ

300W Frosted; 2000Hrs; 5900 CBCP;
2950°K Color Temp

FCZ

500W Frosted; 2000Hrs; 10700 Lumens;
3000°K Color Temp

FCL

500W Clear; 2000Hrs; 10950 Lumens;
3000°K Color Temp

FDN

500W Frosted; 400Hrs; 12800 Lumens;
3200°K Color Temp

FDF

500W Clear; 400Hrs; 13250 Lumens;
3200°K Color Temp

Mounting Options

AD1

Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with Lightweight fixtures.

T1

Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with larger, heavier fixtures.

TA2 / HTA2 (277)

Track adapter for G-Series specification grade 2-circuit track. 120V or 277V.

TA3


Track adapter for G-Series specification grade 3-circuit track. 120V.

TA1 / TE2 (2 circuit)

Track adapter for E-Series specification grade track. 1 or 2 circuit. 120V.

STA

2 circuit track adapter for Data Bus. Specification grade track. 120V.



CM4

Canopy mount.



US1

6 5/8" x 1 1/2" Unistrut adapter.



TB4

6 1/4" Portable wall mount/table base floor, wall or table use.

TB8

8" x 8" Portable table base for floor or table use.



MC


Light duty pipe clamp for small fixtures. For pipes up to 15/16" O.D.

MN

Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

PC9M

Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.



Accessories

See index for details.

LV20

Louwer

BD20

Barndoor

CF20

Color Frame

GF20

Glass Color Filter

DF20

Dichroic Color Filter

GF20-600

5°x50°Linear Lens

GF20-601

Beam Softener

GF20-673

50°x50° Spread Lens

GF20-702

UV Blocking Filter

CC18

Coiled Cord

SC-24

Safety Cable

IP

Integral Dimmer

Extension Wands

SP 12

12" Stem

SP 18

18" Stem

SP 24

24" Stem

SP X

Custom Length

Finish

B

Black

W

White

S

Silver

CC

Custom Color

