



WE80 80W LED

WATER EFFECT PROJECTOR



Powered by a bright 80W LED source, the WE80 80W LED is a simulated water flowing effect that creates an exciting atmosphere that may be projected on walls, ceilings, floors and backdrops.


5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

Specifications


- Bright 80W LED source simulated water flowing effect
- Designed to project on walls, ceilings or floors with or without fog – great for mood or background lighting
- 3 DMX Channels (Dimming, Glass Wheel, Colors)
- 3 operation modes: Show Mode, Manual Mode, & DMX Control
- Stand Alone Set Up or Master-Slave Set Up
- Digital DMX Display with 4-button menu for easy navigation
- Equipped with 2 glass effect wheels and 1 independent dichroic color wheel
- 5 colors + White & Split Colors
- High-tech plastic molded ends protect unit during transport and day-to-day use
- 0-100% Dimming (via DMX)
- Manual focusing lens
- Beam angle: 37 degrees or 27 degrees
- Includes hanging bracket
- Run all night – units stays cool – no duty cycle
- IEC In & Out to Daisy chain Power (Connect up to 10 Fixtures @ 120V & 17 Fixtures @ 230V)
- ADJ UC IR Compatible (sold separately)
- Fan cooled
- Safety hook on rear panel
- Power consumption: 70W
- Long life 80W LED Source (30,000 hr. rating)
- Multi-voltage operation: AC 120-240V 50/60Hz (IEC Plug)
- Dimensions (LxWxH): 11.75" x 9" x 8" / 301 x 232 x 207mm
- Weight: 9 lbs. / 4 kg.
- ETL Approved

Photometrics Data

27° Degree

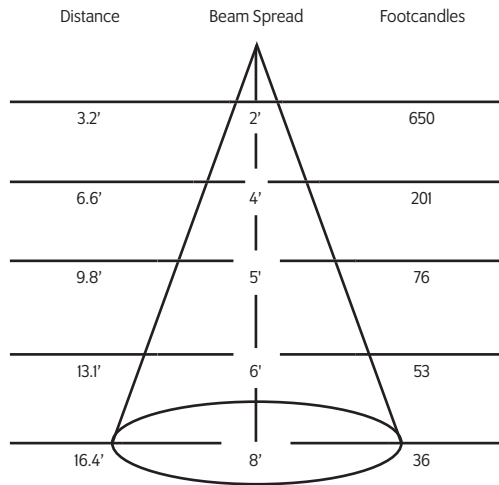


37° Degree

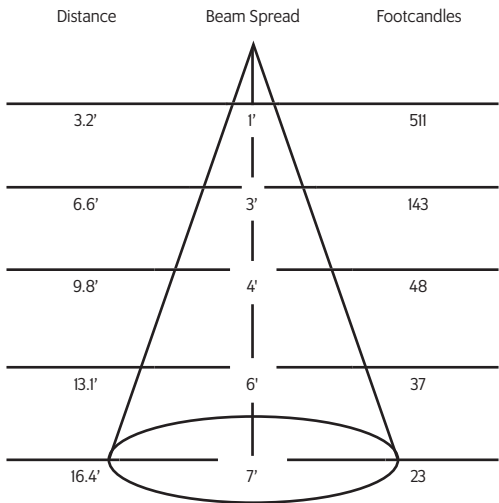


Mounting Options


STA 2 circuit track adapter for Data Bus. Specification grade track. 120V.




CM4 Canopy mount.



US1 6 5/8" x 1 1/2" Unistrut adapter.



TB8 6 1/4" Portable wall mount/table base floor, wall or table use.



MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

Accessories

CC18
SC
UC IR

Coiled Cord
Safety Cable
IR Remote Control