

AR111

SORAA Pendant



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
www.tslight.com

Features an 18.5 Watt Soraa AR111 lamp that produces a tight, narrow beam at 9° with a crisp edge. It is ideal for hospitality, restaurant, retail and artwork lighting. It is available in 95 CRI, and has a light output that mirrors a 75 Watt 12V AR111 lamp.

An extensive range of suspended adjustable multihead gimbal fixtures designed for retail and commercial display lighting. They are available in a number of different sizes and lamp combinations. Precision beam direction is achieved through the double gimbal mechanism, each ring being individually adjustable between 0-40°. The rings and housing are constructed from diecast aluminum and painted in a silver-grey polyester powder coat finish. AR111 halogen lamps offer exceptional beam control with a high light output.

By utilizing Soraa's Snap System, there are unlimited possibilities for customizing this fixture. Options include the ability to field change the beam angle (Beam Spreader Snap), alter color temperature (CTO Snap), or to add a louver. Color Snaps can be used to produce brilliant hues of any color that Rosco or Lee offer.

Manufactured in the USA - IBEW


PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY




Features:

- Extruded aluminum frame
- Double gimbal ring
- Accessory holder
- Custom colors available
- Standard wire length: 59"
- Dimmable


LEDP-AR111-S

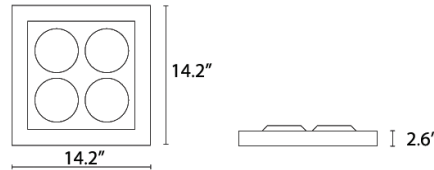


LEDP-AR111-2



LEDP-AR111-3



LEDP-AR111-4



Lamp Type	Watts	CRI	Lumens*
Vivid	18.5	95 (R9=95)	1000

*Lumens vary depending on color temperature - results for 3000K lamp used above.

Ordering Matrix

Model	Configuration	CRI	Color Temperature	Wire Length	Color	Accessories
LEDP-AR111	S=Square (4 Lamps) 2 = 2 Lamps 3 = 3 Lamps 4 = Linear (4 Lamps)	95	27 = 2700K 30 = 3000K	Specify in Inches	S=Silver CC=Custom Color	See Accessory Options for Ordering Codes

*All fixtures sold with 9° beam angle lamps – use Beam Spreaders to achieve desired angle.


Example: LEDP-AR111-4-95-27-S

LEDP-AR111- _____ - _____ - _____ - _____


*Specification sheets are subject to change without notice.

Photometric Data


9° Degree Beam

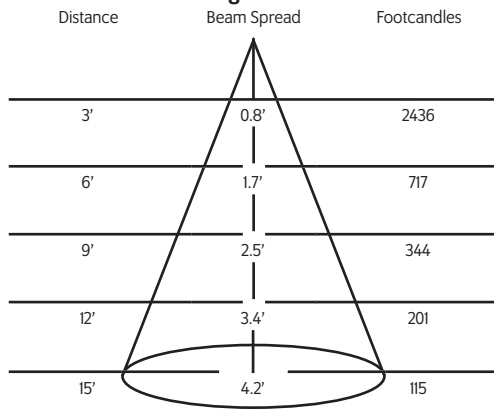


25° Degree Beam

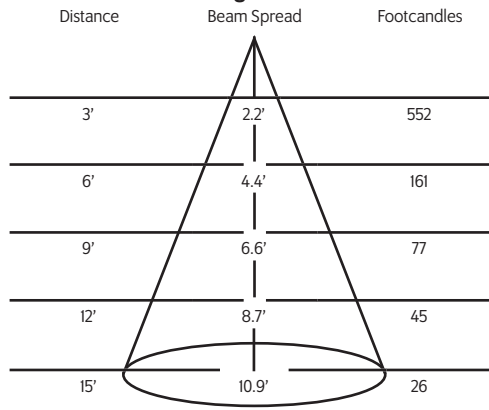

36° Degree Beam

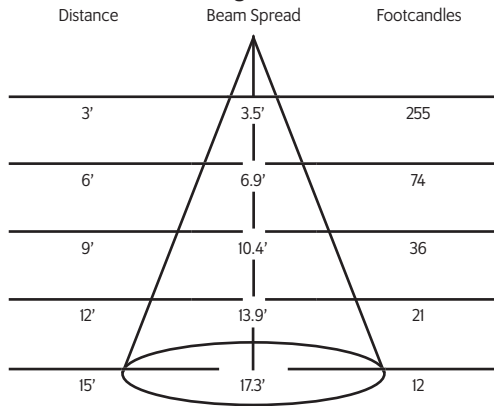

60° Degree Beam

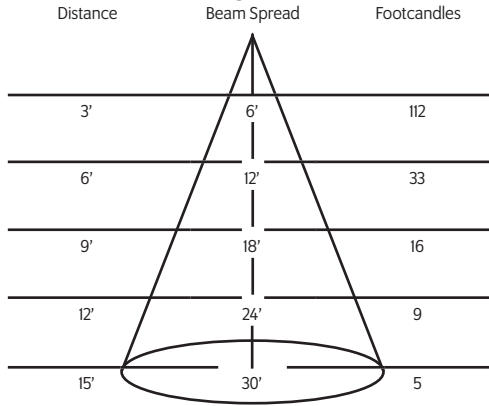

* Beam spread calculated based on field diameter.

Snap Accessories

- 01145** 25° Beam Spreader Snap
- 01147** 36° Beam Spreader Snap
- 01149** 60° Beam Spreader Snap
- 01595** 10°-36° Linear Snap
- 03261** 10°-60° Linear Snap
- 01597** 36°X36° Flat Top Snap
- 01151** 40° Cutoff Louver
- 03257** 20° Maximum Deflection Snap
- 01153** ¼ Color Temperature Shift Snap
- 01155** ½ Color Temperature Shift Snap
- 01157** ¾ Color Temperature Shift Snap
- 03283** Enhance Snap
- 02185-C** Color Snap (Specify Color)

IES Files

Visit tslight.com to find comprehensive IES data.

Finish

- S** Silver
- CC** Custom Color