



RB5-RGBVW

5 RGBVW



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

The RB5-RGBVW - Revolutionary high powered 5-in-1 LED wash fixture. With the addition of 18x 15-watt RGBVW 5-in-1 LEDs, advanced electronics, and dual hanging brackets with secure grip locking knobs, the RB5-RGBVW is sure to be a great addition to your lighting rig!

It features 4/5/9 or 10 DMX channel modes, which means it works great with any type of controller, including popular 4-channel controllers. You'll have full control of all that RB5-RGBVW has to offer such as RGBVW color mixing, 31 built-in programs, ultra smooth flicker-free 32-bit dimming (5 user-selectable dimming curves), and even easy HSV color mixing ability in 4-channel mode.

The super-easy to use built-in 4-button LED control panel also allows total control over the fixture including master/slave settings, sound active mode, built-in programs, auto mode, custom RGBVW color mixing, and user adjustable fade/strobe effects for a totally rocking light show!

Additional Features

- Beam Angle: 25 degree optics standard, 26 degree beam, 30 degree field
- Light source: 18x 15W 5-in-1 LEDs 100,000 hours.
- Operating Voltage: 90-230VAC 50-60Hz
- Power Consumption: 164W Max
- Luminous Intensity: 27,000 LUX (Full RGBVW) @ 1M

Weight & Dimensions

- **Length:** 9.22 inches (234 mm)
- **Width:** 6.5 inches (165 mm)
- **Height:** 8.98 inches (228 mm)
- **Weight:** 7.28 lbs (3.3 kg)

Control Features


- RGBVW color mixing via 18x 15W Red/Green/Blue/UV/White 5-in-1 LEDs
- 442nm UV LEDs
- Built-in color & chase macros via DMX
- Built-in automated and sound active programs via master/slave
- RGBVW color mixing ability in standalone mode
- 3-pin male input and 3-pin female output
- Rugged and well-built (It hits the gym regularly)
- Dual mounting brackets for positioning flexibility
- Flicker-free constant-current 400hz LED driver
- 3-pin male input and 3-pin female output
- PowerCon™ compatible AC power In/Out connectors

RB5-RGBVW Luminous Intensity


RokBox 5 RGBVW	1M	2M	5M
Red	6,300	2,200	300
Green	6,700	2,400	400
Blue	8,000	2,900	500
UV	1,800	600	100
White	7,700	2,700	400
All (Full RGBAW)	27,000	9,600	1,400

Features

RGBVW - 26° Beam

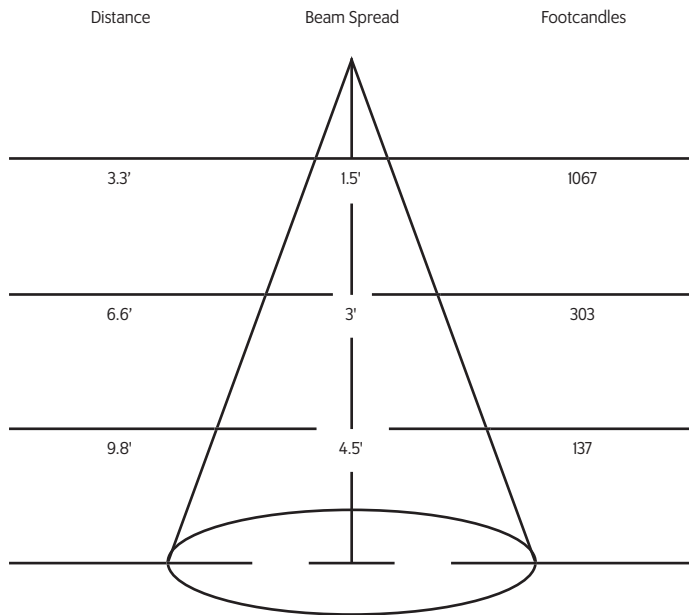


Red - 26° Beam

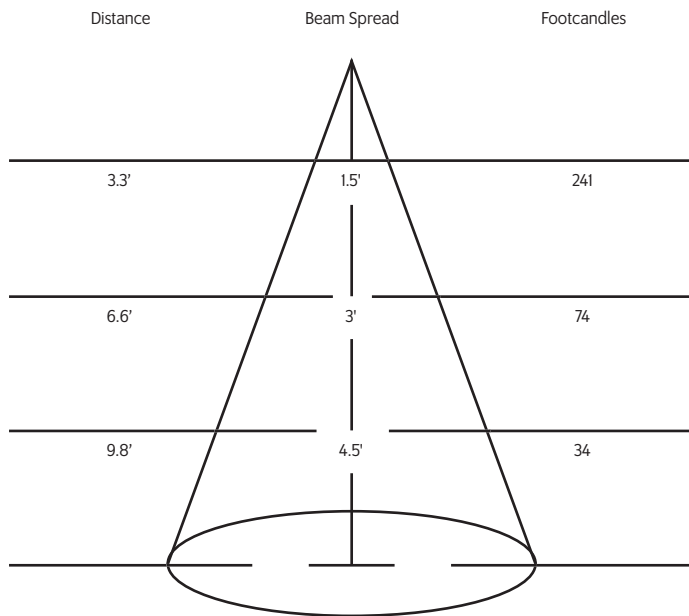


Mounting Options

STA 2 circuit track adapter for Data Bus. Specification grade track. 120V.



CM4 Canopy mount.

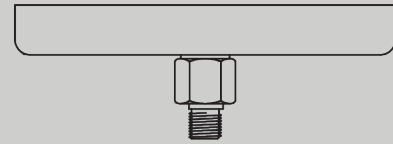

US1 6 5/8" x 1 1/2" Unistrut adapter.



TB4 6 1/4" Portable wall mount/table base floor, wall or table use.



MC Light duty pipe clamp for small fixtures. For pipes up to 1 5/16" O.D.

MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

PC9M Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.

