



QUADRA 1P65

RGBAW-UV LED Specification Sheet



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

Quadra is a tough IP-65 Rated PAR fixture featuring industry-leading color reproduction and output thanks to its 18x 10-watt Quad-Color RGBW LEDs. Multicolored shadowing is a thing of the past thanks to a 4-in-1 LED technology, and color gamut is increased exponentially with the addition of white LEDs. It sports a durable cast aluminum with a tempered glass lens, watertight internal gaskets, and provides exceptional quality, and ease of use.

Astounding RGBW color mixing via 18x 10W Red/Green/Blue/White 4-in-1 LEDs.

- Variable electronic strobe & dimmer w/ 32-bit dimming.
- Built-in color & chase macros via DMX
- Built-in automated programs via master/slave
- RGBW color mixing ability in standalone mode
- HSV (3-Ch), RGBW (4-Ch), RGBW + Dimmer (5-Ch) & Extended (8-Ch/9-Ch) DMX Profiles
- 5 user-selectable 32-bit dimming curves
- Tough-As-Nails IP65-rated enclosure
- Totally silent convection cooling
- Dual mounting brackets for positioning flexibility
- Flicker-free constant-current LED driver

Control


- DMX Channels 3 / 4 / 5 / 8 / 9
- Other Operating Modes: Standalone, Master/Slave, Color Preset
- LED 4-button control panel

Power

- Operating Voltage 90-230VAC, 50-60 Hertz
- Fuse 3A 250V
- Power Consumption 140W

Optics

- Light Source: 18x 10W 4-in-1 LEDs 100,000 hours
- Beam Angle: 25 degree optics standard
- 26° degree beam,
- 30° degree field
- Luminous Intensity: 25,000 Lux @ 1m (25° degree optics)

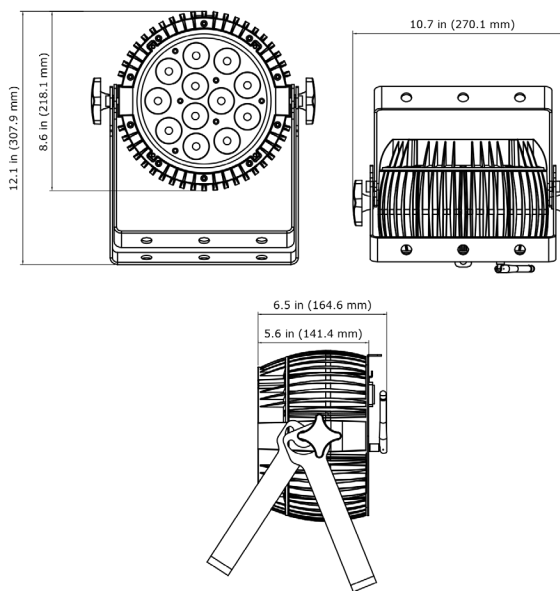

Weight & Dimensions

- Dimensions: 10" (254 mm) x 7.5" (193 mm) x 11 inches (284 mm)
- Weight: 11 lbs. (5 kg)

Mounting Options

- MNB** Clamp for pipe up to 2" OD
CM4 Canopy for mounting to J-box
USI Unistrut mount
STA Controltrac adapter (2x)

Ordering Matrix

Model	Array	Finish -	Mounting
QUADRA	RGBAW	B=Black W= White	See Options

Example: QUADRA-RGBAW-B-MNB

QUADRA - _____ - _____ - _____

*Specification sheets are subject to change without notice.