



Manufactured in the USA - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

Features

- Accepts PAR38 type lamps
- Pipe mount or floor mount with the use of its x-bar stand
- Built-in gel holder
- 6 ft. cable with U-Ground plug

Finish

B	Black
W	White

Fade•Not® X•Film™

Fade•Not® X•Film™ is produced using a high temperature polymer film with Fade•Not® coating. The combination of these two materials produces a gel with up to 30 times the longevity of standard gel.

FX5-10	Cut Yellow Filter
FX5-21	Cut Amber Filter
FX5-26	Cut Red Filter
FX5-33	Cut Pink Filter
FX5-64	Cut Blue Filter

LED Lamp Types (Not Included)

9327-25	2700K 14.5W 25° PAR38 LED
9330-25	3000K 14.5W 25° PAR38 LED
9340-25	4000K 26W 25° PAR38 LED
9327-40	2700K 14.5W 40° PAR38 LED
9330-40	3000K 14.5W 40° PAR38 LED
9340-40	4000K 26W 40° PAR38 LED

LAMPS ARE TRIAC DIMMABLE, CONSULT FACTORY FOR ADDITIONAL BEAM ANGLE AND CCT OPTIONS.


**Specification sheets are subject to change without notice.*

FR38 PAR38



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
www.tslight.com

Ideal for travel/rental companies where quick and easy installation and break-down is required. Each unit is supplied with an x-bar that acts as a base when opened, or pipe mounted via zip ties when closed. A specially spun front omits the need for gel frames. Comes in standard black and white finish.

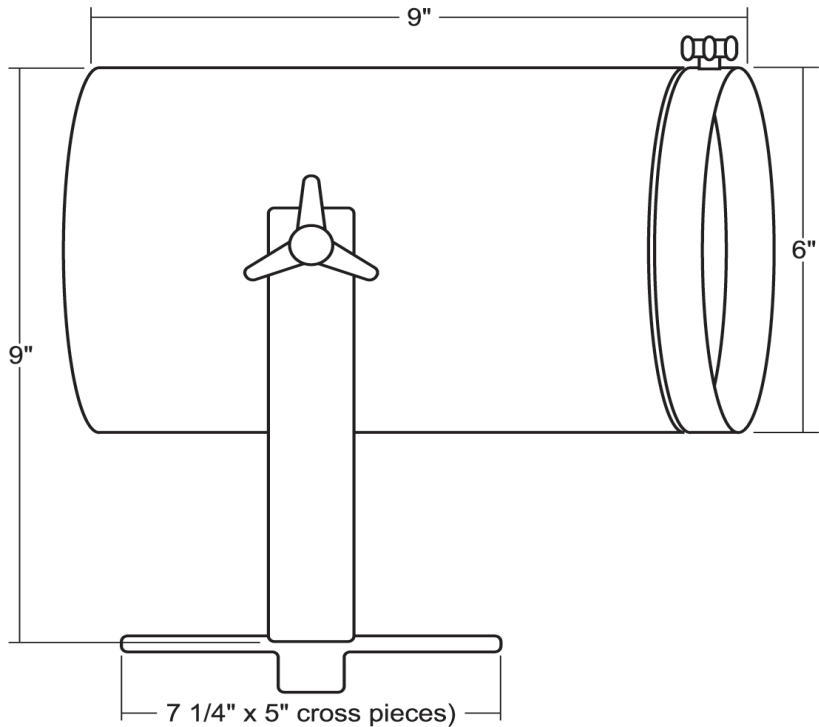

Mounting Options

X-Bar	7" cross bars. * Item included in purchase of this fixture.
MN	Medium duty pipe clamp for small to large fixtures. For pipes 3/4" to 1.9" O.D.
PC9C	Heavy duty pipe clamp for large, heavy fixtures. For pipes 1-3/8" to 2" O.D.
SC	1/8" diameter, 30" long steel safety cable with snap ring. Used as added security when large or heavy fixtures are being used.