



# 36C 35-75W

PAR36 / AR111



5 Holt Drive,  
Stony Point, NY 10980  
845-947-3034  
info@tslight.com

The 36C is a low voltage PAR36/AR111 fixture sure to enhance any lighting design. This unit accepts low voltage PAR36 and AR111 lamps from 35 to 75-watts. These lamps come in a variety of beam spreads and can outperform most incandescent lamps twice the wattage. They offer excellent color rendering and produce a white, bright light with longer lamp life and minimal heat output.


The 36C features an adjustable self-locking head and an electronic transformer. Its hinged front is easily opened for re-lamping. Accept louvers, barndoors, hoods and a variety of filters. Comes in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

Manufactured in the USA - IBEW



## Features

- 120, 220 and 277-volt available
- Integral 12-volt dimmable transformer
- Accepts PAR36 and AR111 lamps from 35 to 75-watts
- Rotating lamp holder for beam definition
- Numerous mounting options and accessories
- Weight: 1.6 lbs

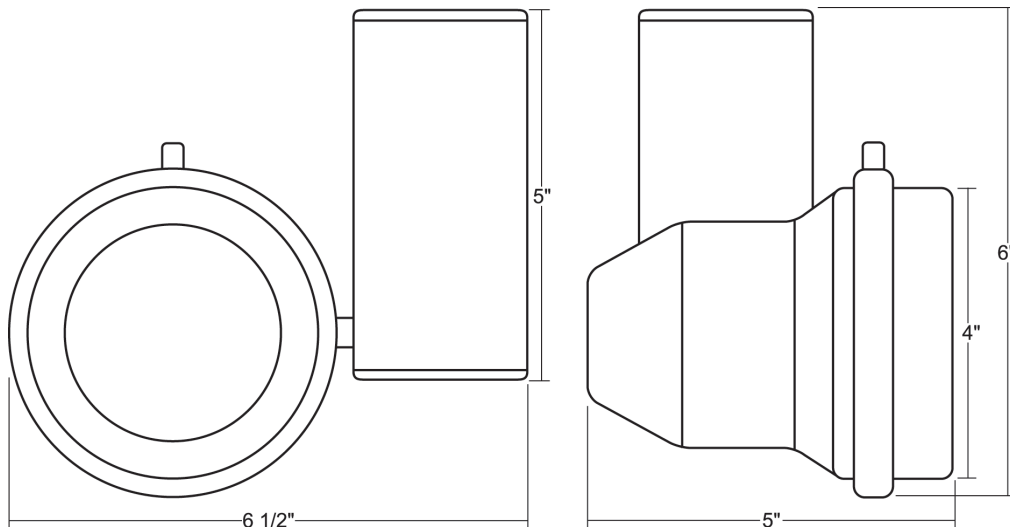

## Lamp Types\*

<b>35PAR36/H/SP5</b>	35W/12V; 4000Hrs; 5° Beam; 25000 CBCP; 3050°K Color Temp
<b>35PAR36/H/SP8</b>	35W/12V; 4000Hrs; 8° Beam; 8000 CBCP; 3050°K Color Temp
<b>35PAR36/H/FL30</b>	35W/12V; 4000Hrs; 30° Beam; 900 CBCP; 3050°K Color Temp
<b>35PAR36/H/VWFL</b>	35W/12V; 4000Hrs; 3050°K Color Temp
<b>50PAR36/H/SP5</b>	50W/12V; 4000Hrs; 5° Beam; 39000 CBCP; 3050°K Color Temp
<b>50PAR36/H/SP8</b>	50W/12V; 4000Hrs; 8° Beam; 10000 CBCP; 3050°K Color Temp
<b>50PAR36/H/FL30</b>	50W/12V; 4000Hrs; 30° Beam; 1300 CBCP; 3050°K Color Temp
<b>* 35AR111/SSP4</b>	35W/12V; 3000Hrs; 4° Beam; 40000 CBCP
<b>* 35AR111/SP8</b>	35W/12V; 3000Hrs; 8° Beam; 14000 CBCP
<b>* 35AR111/FL25</b>	35W/12V; 3000Hrs; 25° Beam; 2500 CBCP
<b>* 50AR111/SSP4</b>	50W/12V; 3000Hrs; 4° Beam; 45000 CBCP
<b>* 50AR111/SP8</b>	50W/12V; 3000Hrs; 8° Beam; 20000 CBCP
<b>* 50AR111/FL25</b>	50W/12V; 3000Hrs; 25° Beam; 4000 CBCP
<b>* 75AR111/SP8</b>	75W/12V; 3000Hrs; 8° Beam; 30000 CBCP
<b>* 75AR111/FL25</b>	75W/12V; 3000Hrs; 25° Beam; 5300 CBCP
<b>* 75AR111/WFL45</b>	75W/12V; 3000Hrs; 45° Beam; 2000 CBCP

\* Requires glass safety shield GS6.

## Ordering Matrix



Model	Finish	Mounting	Accessories
36C	B = Black W = White S = Silver CC = Custom Color	See Mounting Options	See Accessory Options

Example: 36C-B-T1-LV1

36C-\_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

\* Specification sheets are subject to change without notice.

## Photometric Data

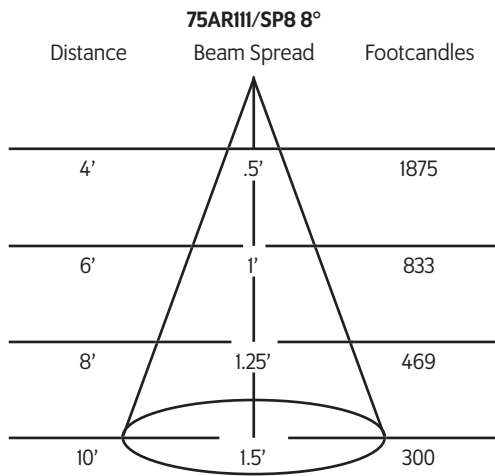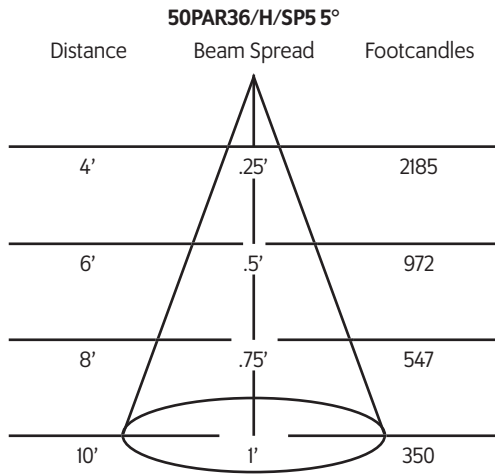

## Light Blocking Screens

Stainless steel screens used singly or in combinations to block transmitted light without changing color temperature.

<b>LBS10-20</b>	20% Light Blocking
<b>LBS10-30</b>	30% Light Blocking
<b>LBS10-40</b>	40% Light Blocking

## Mounting Options

**AD1**  
Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with Lightweight fixtures.


**T1**  
Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with larger, heavier fixtures.

**TA2 / HTA2 (277)**  
Track adapter for G-Series specification grade 2-circuit track. 120V or 277V.


**TA3**  
Track adapter for G-Series specification grade 3-circuit track. 120V.

**TA1 / TE2 (2 circuit)**  
Track adapter for E-Series specification grade track. 1 or 2 circuit. 120V.

**ST2**  
2 circuit track adapter for Data Bus. Specification grade track. 120V.



**CM4**  
Canopy mount.



**US1**  
6 5/8" x 11/2" Unistrut adapter.



**TB4**  
6 1/4" Portable wall mount/table base floor, wall or table use.

**TB8**  
8" x 8" Portable table base for floor or table use.



**MC**  
Light duty pipe clamp for small fixtures. For pipes up to 15/16" O.D.

**MN**  
Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

**PC9M**  
Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.



## Accessories

<b>LV6</b>	Louwer
<b>XL6</b>	Cross Baffle Louwer
<b>BD10</b>	Barndoor
<b>HD6</b>	Hood
<b>XH6</b>	Cross Baffle Hood
<b>GF10-Clear</b>	AR111 Glass Shield
<b>CF10</b>	Color Frame
<b>GF10</b>	Glass Color Filter
<b>DF10</b>	Dichroic Color Filter
<b>GF10-600</b>	5°x50° Linear Lens
<b>GF10-601</b>	Beam Softener
<b>GF10-673</b>	50°x50° Spread Lens
<b>GF10-702</b>	UV Blocking Filter
<b>CC18</b>	Coiled Cord
<b>SC-24</b>	Safety Cable
<b>DM</b>	Integral Dimmer



## Extension Wands

<b>SP 12</b>	12" Stem
<b>SP 18</b>	18" Stem
<b>SP 24</b>	24" Stem
<b>SP X</b>	Custom Length

## Finish

<b>B</b>	Black
<b>W</b>	White
<b>S</b>	Silver
<b>CC</b>	Custom Color