

R11

18.5W LED / AR111



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

The R11 features an 18.5 Watt Soraa AR111 LED lamp. It is ideal for hospitality, restaurant, retail and artwork lighting. It is available with 85 or 95 CRI lamps and has a light output that mirrors a 75 Watt 12V AR111 lamp.



By utilizing Soraa's Snap System, there are unlimited possibilities for customizing this fixture. Options include the ability to field change the beam angle (Beam Spreader Snap), alter color temperature (CTO Snap), or to add a louver. Color Snaps can be used to produce brilliant hues of any color that Rosco or Lee offer.

Manufactured in the USA - IBEW



Features

- 120, 220 and 277-volt available
- Integral 12-volt dimmable driver
- Available in 2700K, 3000K, 4000K.
- Beam angles of 9d, 25d, 36d, and 60d
- Rated life of 35,000 hours
- Numerous mounting options and accessories
- Weight: 2 lbs

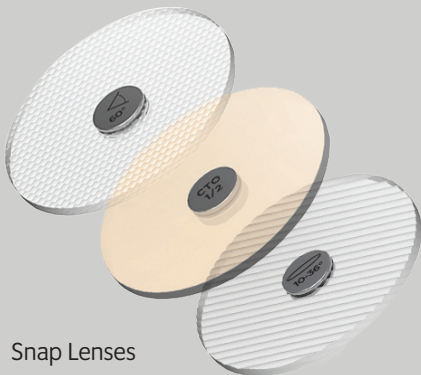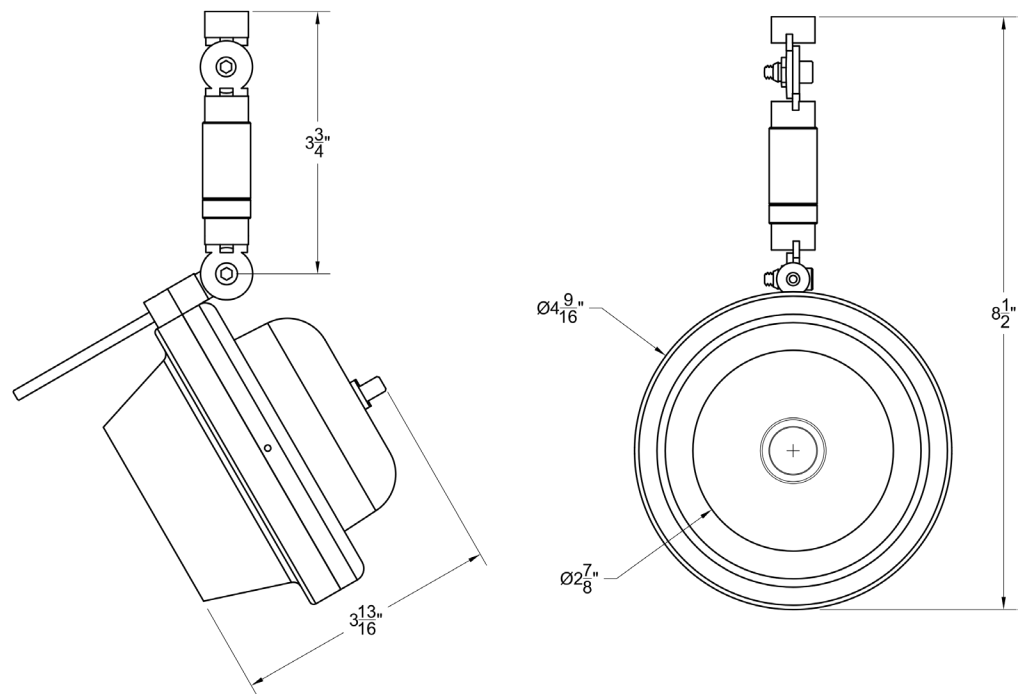

Snap Lenses

Lamp Type	Watts	CRI	Lumens*
Brilliant	18.5	85 (R9=0)	1280
Vivid	18.5	95 (R9=95)	1000

*Lumens vary depending on color temperature - results for 3000K lamp used above.

Ordering Matrix

Model	CRI	Color Temperature	Color	Mounting Options	Accessories
R11	95 85	27 = 2700K 30 = 3000K 40 = 4000K	B=Black W=White S=Silver CC=Custom Color	See Mounting Options for Ordering Codes	See Accessory Options for Ordering Codes





*All fixtures sold with 9° beam angle lamps – use Beam Spreaders to achieve desired angle.

Example: R11-9527-B-AD1-LV6

R11- _____ - _____ - _____ - _____

*Specification sheets are subject to change without notice.

Photometric Data

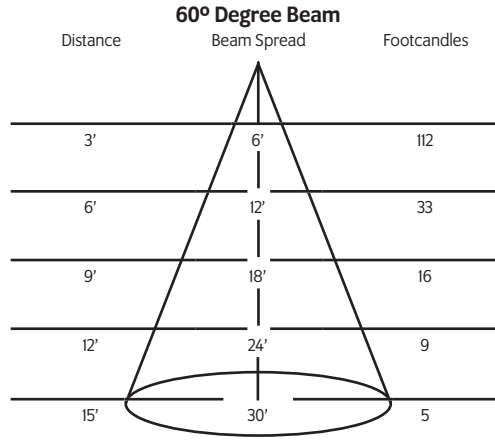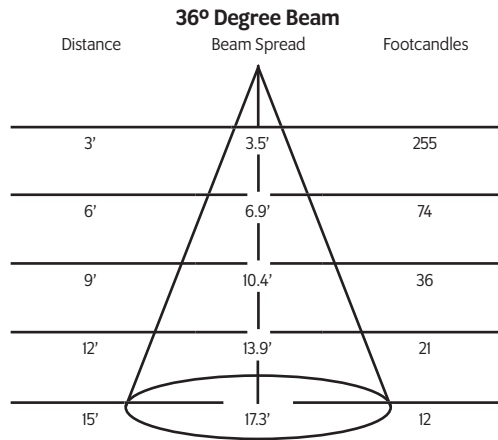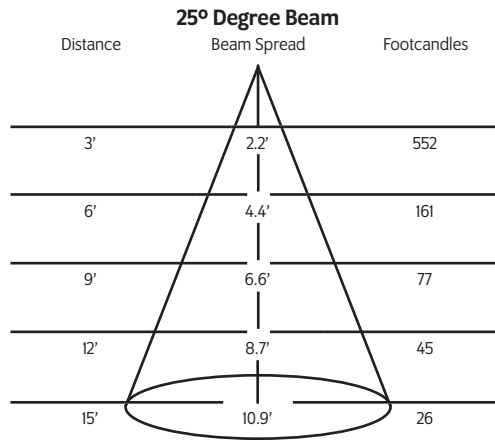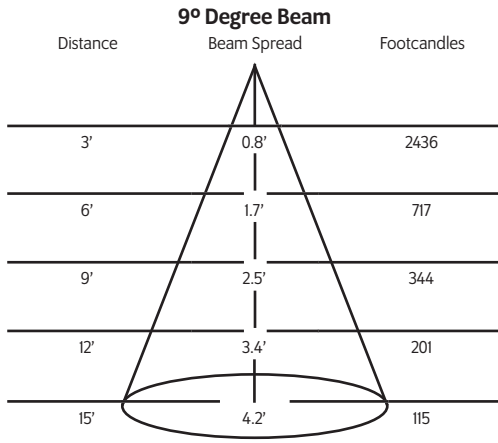

* Beam spread calculated based on field diameter.


Mounting Options

N13 Track adapter for commercial grade 1 & 2 circuit track. 120V.


N2 Track adapter for G-Series specification grade 2-circuit track. 120V.

N7 Track adapter for G-Series specification grade 2-circuit track. 277V.

N3 Track adapter for G-Series specification grade 3-circuit track. 120V.



CM4 Canopy mount.



Snap Accessories

- 01145** 25° Beam Spreader Snap
- 01147** 36° Beam Spreader Snap
- 01149** 60° Beam Spreader Snap
- 01595** 10°-36° Linear Snap
- 03261** 10°-60° Linear Snap
- 01597** 36°X36° Flat Top Snap
- 01151** 40° Cutoff Louver
- 03257** 20° Maximum Deflection Snap
- 01153** ¼ Color Temperature Shift Snap
- 01155** ½ Color Temperature Shift Snap
- 01157** ¾ Color Temperature Shift Snap
- 03283** Enhance Snap
- 02185-C** Color Snap (Specify Color)

IES Files

Visit tslight.com to find comprehensive IES data.