



TS05 7.5W

SORAA LED



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

A classic design and favorite, this budget friendly fixture can complement any décor. The TS05 features a line voltage power Soraa LED lamp with a GU10 base. These LED lamps work with most leading or trailing edge dimmers. Made of an extruded aluminum construction, the TS05 is dependable for residential and commercial applications. Numerous mounting options and accessories are available.

By utilizing Soraa's Snap System, there are unlimited possibilities for customizing this fixture. The unit come with a 10° SORAA LED. Options include the ability to field change the beam angle (Beam Spreader Snap), alter color temperature (CTO Snap), or to add a louver. Color Snaps can be used to produce brilliant hues of any color that Rosco or Lee offer.

The Enhance Lens Snap can increase the vividness of warm colors (including red, orange and pink and greens). Aim Snaps can bend the beam to a maximum deflection angle of 20°. Linear Snap Lenses can alter the beam to act as a wall wash.

Manufactured in the USA - IBEW



LED


- 10° SORAA lamp included - use snaps to change the beam angle.
- Color temp options: 2700K, 3000K, 4000K
- CRI: 85 or 95
- No UV or IR

Dimming*

- Trailing edge (ELV)
- Leading edge (Triac)

Construction

- Extruded aluminum housing with black, white or silver finish
- 0-180° tilt, 360° rotation
- Locking yoke
- Accepts accessories
- Weight: 1.5 lbs.

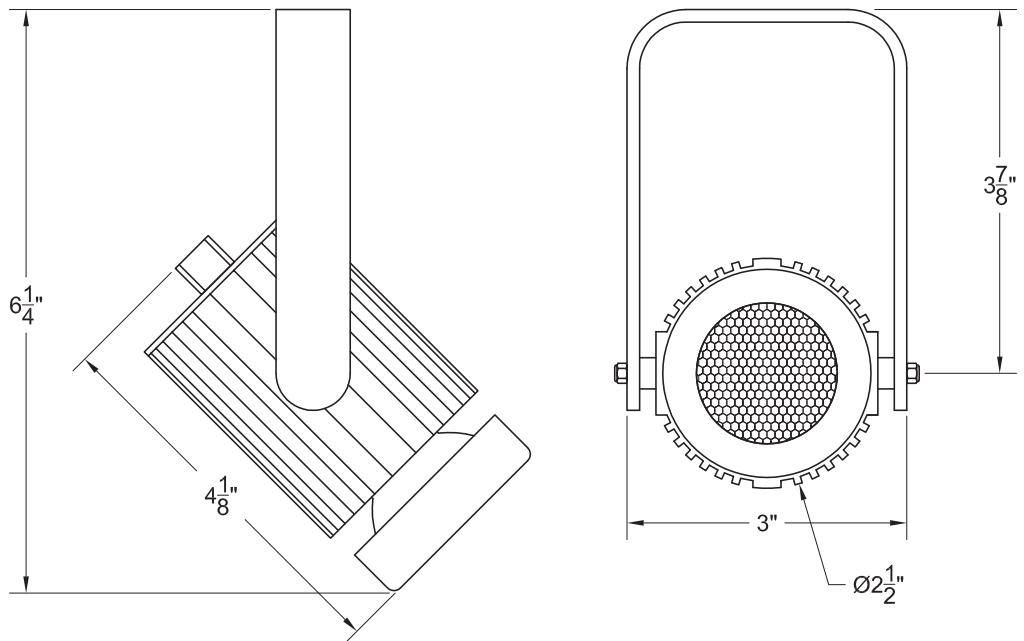

Lamp Type	Watts	CRI	Lumens*
Brilliant	7.5	85 (R9=0)	500
Vivid	7.5	95 (R9=95)	410

*Lumens vary depending on color temperature - results for 3000K lamp used above.


Ordering Matrix

Model	CRI	Color Temperature	Color	Mounting Options	Accessories
TS05*	95 85	27 = 2700K 30 = 3000K 40 = 4000K	B=Black W=White S=Silver CC=Custom Color	See Mounting Options for Ordering Codes	See Accessory Options for Ordering Codes

*Comes with 10° SORAA lamp.

Example: TS05-95-27-B-ADI-LV1

TS05- _____ - _____ - _____ - _____ - _____

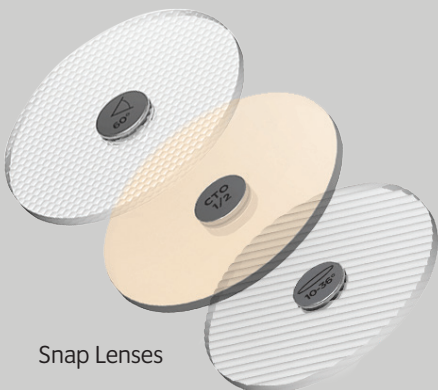


Snap Lenses


*Specification sheets are subject to change without notice.

Photometric Data


10° Degree Beam

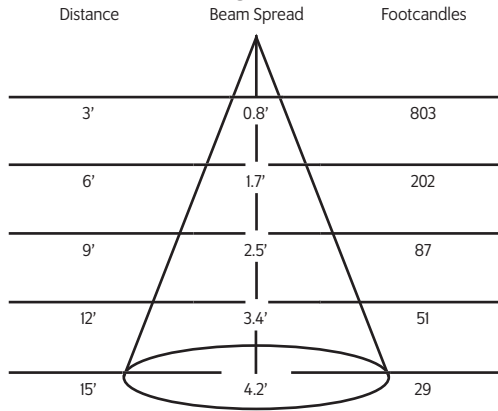


25° Degree Beam

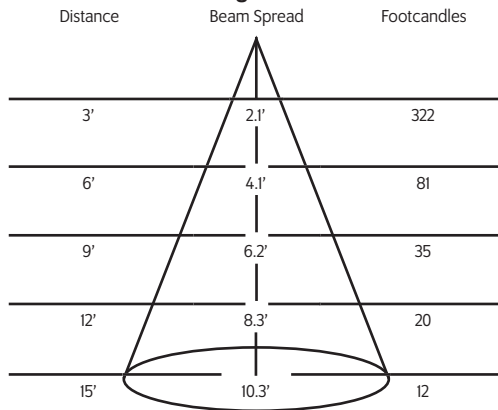

36° Degree Beam

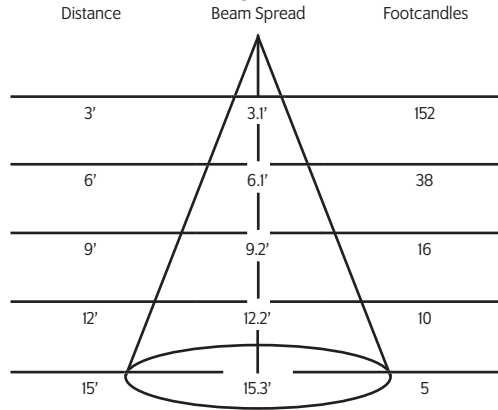

60° Degree Beam

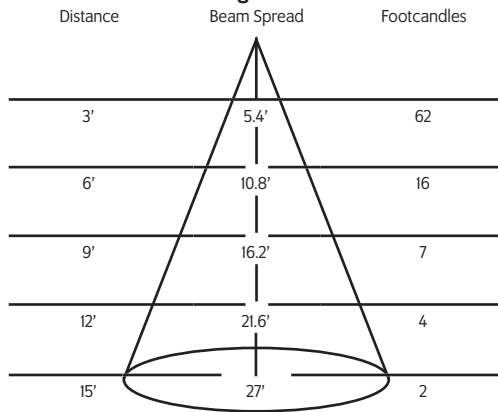


* Calculated with a 3000K 80 CRI lamp.

Mounting Options


AD1 Track Adapter for commercial grade 1 & 2 circuit track. 120V. For use with lightweight fixtures.

TA2 Track adapter for G-Series specification grade 2-circuit track. 120V or 277V.

TA3 Track adapter for G-Series specification grade 3-circuit track. 120V.



CM4 Canopy Mount



US1 6⁵/₈" x 1¹/₂" Unistrut Adapter



Snap Accessories

- 00325** 25° Beam Spreader Snap
- 00327** 36° Beam Spreader Snap
- 00329** 60° Beam Spreader Snap
- 00331** 10°-25° Linear Snap
- 00333** 10°-36° Linear Snap
- 03259** 10°-60° Linear Snap
- 00335** 25°X25° Flat Top Snap
- 00337** 36°X36° Flat Top Snap
- 00339** 40° Cutoff Louver
- 00325** 20° Maximum Deflection Snap
- 00323** ¼ Color Temperature Shift Snap
- 0032** ½ Color Temperature Shift Snap
- 00319** ¾ Color Temperature Shift Snap
- 03281** Enhance Snap
- 02183-C** Color Snap (Specify Color)

Fixture Accessories

- LVI** Louver
- DFI** Dichroic Color Filter

Extension Wands

- SP 12** 12" Stem
- SP 18** 18" Stem
- SP 24** 24" Stem
- SP X** Custom Length

IES Files

Visit tslight.com to find comprehensive IES data.