



Manufactured in the USA - IBEW



### Power


- Power Consumption: 28W  
Max. Operating Temp.: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.

### Optics

- 10°, 20°, 40° or 60°  
field-changeable reflectors

### Weight

- Weight: 2 lbs.

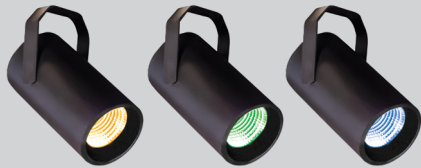

\* Specification sheets are subject to change without notice.

# MOSAIC Flood




5 Holt Drive,  
Stony Point, NY 10980  
845-947-3034  
www.tslight.com

## Color Mixing - Tunable White

The Mosaic Flood features tunable color and a high CRI output. It also features tunable white from 1800K-8000K with a CRI of 90+ across the entire temperature range. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 10° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

### Key Features:

- 2000 Lumen Output
- 4 DMX Channels
- Tunable range: 1650 - 8000K tunable white.
- 90+ CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life
- On-board Bluetooth Low Energy (BLE) included in every fixture

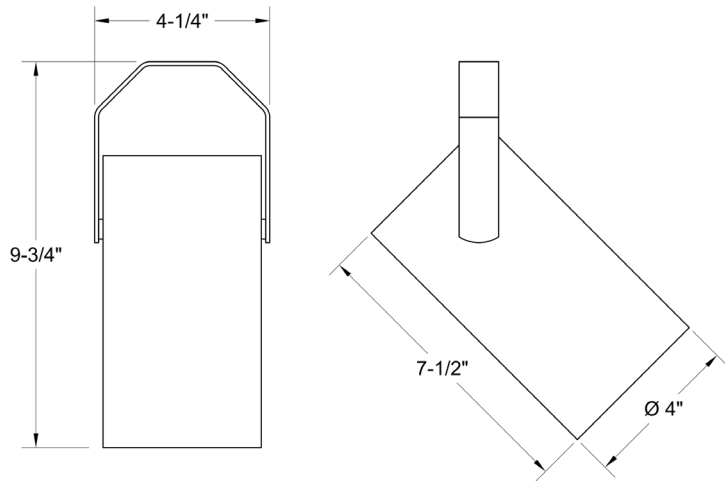

## Ordering Matrix

Model	Finish	Optics	Mounting	Dimming*
ACT20	B - Black W - White S - Silver CC - Custom Color	10 = 10° 20 = 20° 40 = 40° 60 = 60°	See Mounting Options	BT = Bluetooth DX = DMX / RDM


\* Maximum Ambient Temperature 40° C

**Example:** ACT20-B-60-STA-010


ACT20 - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

## Photometric Data 4000° K 95CRI


### 10° Spot Reflector

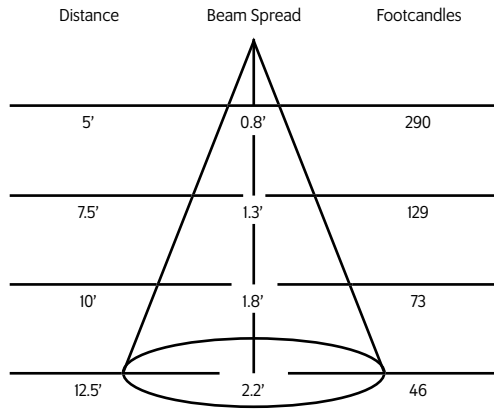


### 20° Spot Reflector

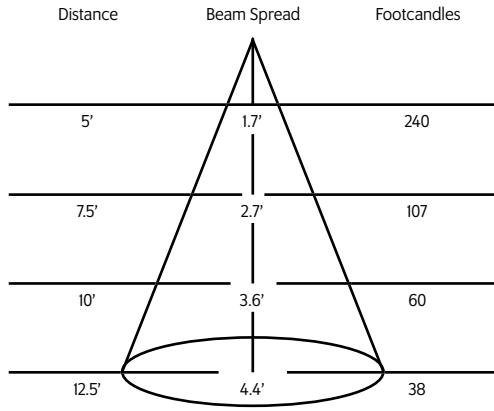

### 40° Medium Flood Reflector

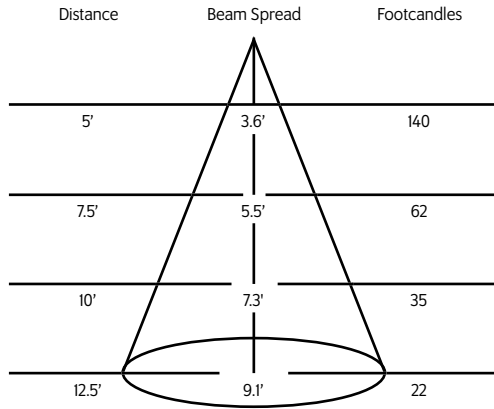

### 60° Flood Reflector

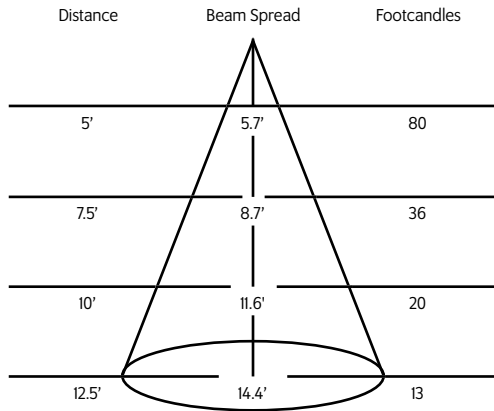


## Mounting Options

**DT2** 2-circuit track adapter for SpecTrack databus. 120V.

**HDT2** Track adapter for SpecTrack 2-Circuit data track. 277V.


**GAC** Track adapter for Pulse data track. 120V.



**US1\*** 6 5/8" x 1 1/2" Unistrut adapter.



**MN\*** Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.



**DXTC** Canopy mount with terminal block for DMX.

**CM4\*** Canopy mount (Bluetooth, 010V dimming, lutron ecosystem only).

**PIG\*** (Bluetooth, 010V dimming, lutron ecosystem only).

\* Contact factory for wiring details.

## Accessories

<b>BD20</b>	Barndoor
<b>LV22</b>	Full Size Louver
<b>XL22</b>	Full Size X Baffle Louver
<b>XH22</b>	Full Size X Baffle Hood
<b>HD22</b>	Hood/Snoot
<b>X00517</b>	Accessory Holder
<b>LV18*</b>	Honeycomb Louver
<b>OF22-9101*</b>	Smoothing Frost Filter
<b>GF22-600*</b>	5x50 Linear Lens
<b>GF22-601*</b>	Solite Softner
<b>GF22-673*</b>	50 x 50 Spread Lens
<b>SC024</b>	Safety Cable

\* X00517 Required, not compatible with 10° reflector option.

## Extension Wands

<b>SP 12</b>	12" Stem
<b>SP 18</b>	18" Stem
<b>SP 24</b>	24" Stem
<b>SP X</b>	Custom Length

\* For notes on dimming, please [click here](#).