



MOSAIC Flood



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
www.tslight.com

Color Mixing and Tunable White

The Mosaic Flood features tunable color and a high CRI output. It also features tunable white from 1650K-8000K with a CRI of 90+ across the entire temperature range. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 10° and 60°. This fixture is perfect for retail applications such as car dealerships and clothing stores but is equally well suited for illuminating artwork or using it in an archtainment setting.

Manufactured in the USA - IBEW



Power


- Power Consumption: 28W
Max. Operating Temp.: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only (No onboard DMX).

Optics

- 10°, 20°, 40° or 60° field-changeable reflectors

Weight

- Weight: 2 lbs.

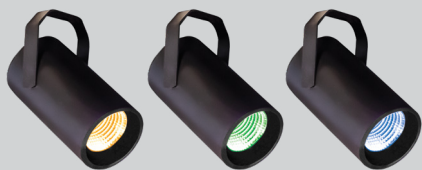


Emitter 2-Year Warranty

The warranty on the LED Emitter used in this Times Square Lighting product shall have a two year warranty from the date of purchase.



* Specification sheets are subject to change without notice.

- 2000 Lumen Output
- 4 DMX Channels
- RGBW Color Tuning
- **Tunable range:** 1650 - 8000K tunable white.
- 90+ CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life

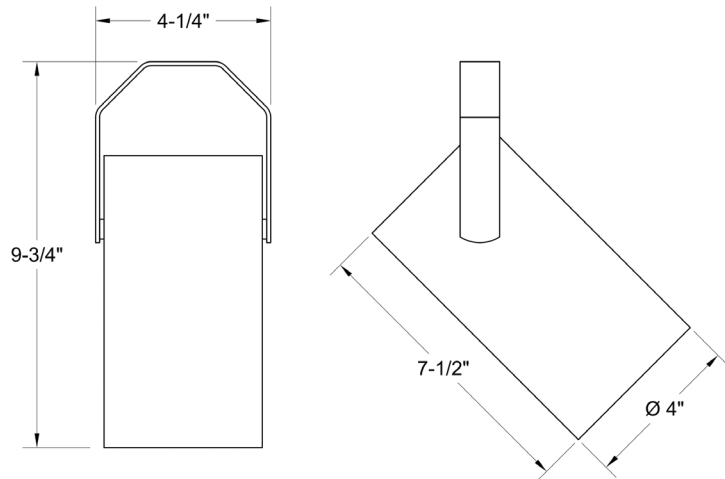

Ordering Matrix

Model	Finish	Optics	Mounting	Dimming*
ACT22	B - Black W - White S - Silver CC - Custom Color	10 = 10° 20 = 20° 40 = 40° 60 = 60°	See Mounting Options	BT = Bluetooth DX = DMX / RDM


* Maximum Ambient Temperature 40° C

Example: ACT22-B-60-STA-DX


ACT22 - _____ - _____ - _____ - _____

Photometric Data 4000° K 95CRI


10° Spot Reflector

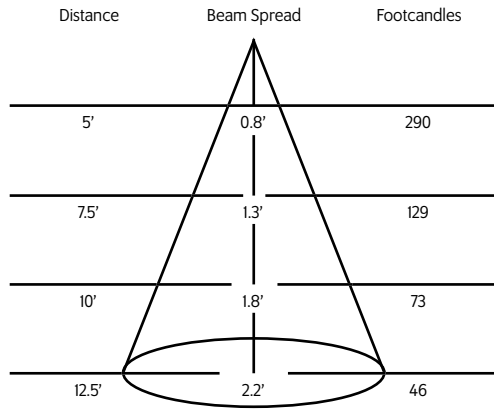


20° Spot Reflector

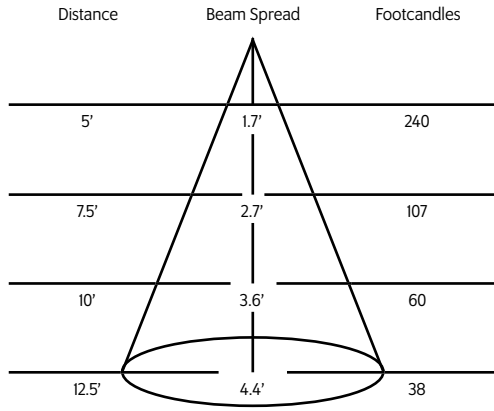

40° Medium Flood Reflector

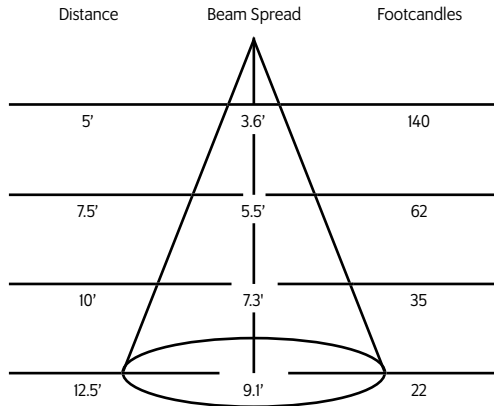

60° Flood Reflector

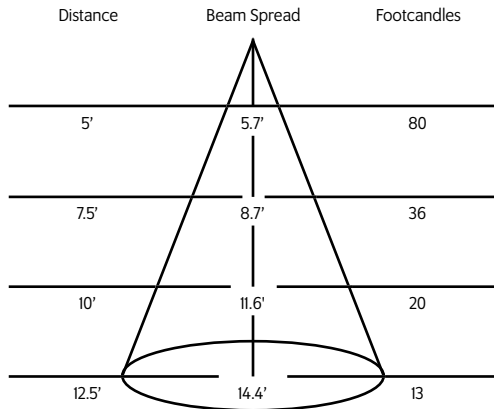

Mounting Options

DT2 2-circuit track adapter for SpecTrac databus, 120V.

HDT2 2-circuit track adapter for SpecTrac databus, 277V.

DXTC Canopy mount with terminal block for DMX.

GAC Track adapter for 120V global pulse track.

CM4* Canopy mount (Bluetooth, 010V dimming only)

US1 6 $\frac{5}{8}$ " x 1 $\frac{1}{2}$ " Unistrut Adapter

TB8 8" x 8" Portable table base for floor and table use

MC Light duty pipe clamp for small fixtures. For pipes up to 1 $\frac{5}{16}$ " O.D.

MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

PC9M Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.

* Contact factory for wiring details.

Accessories

BD20	Barndoor
LV22	Full Size Louver
XL22	Full Size X Baffle Louver
XH22	Full Size X Baffle Hood
HD22	Hood/Snoot
X00517	Accessory Holder
LV18*	Honeycomb Louver
OF22-9101*	Smoothing Frost Filter
GF22-600*	5x50 Linear Lens
GF22-601*	Solite Softner
GF22-673*	50 x 50 Spread Lens
SC024	Safety Cable

* X00517 Required, not compatible with 10° reflector option.

Extension Wands

SP 12	12" Stem
SP 18	18" Stem
SP 24	24" Stem
SP X	Custom Length

* For notes on dimming, please [click here](#).