



56L

40W LED PAR56



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

The 56L is designed for medium throw applications including malls, retail stores, display and exhibit areas, galleries, museums and installations that require a high intensity, compact fixture.


The 56L features a wrench-lock yoke and accessory-retaining clips that accept louvers, barndoors, hoods and filters. Available in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

Manufactured in the USA - IBEW

PRODUCT LISTED
BY A NATIONALLY
RECOGNIZED
TESTING
LABORATORY

Features

- Suitable to replace 300W halogen
- Dimmable with forward and reverse phase controls
- Multi optic lens design rich and vibrant colors
- High candela output up to 24,000cd
- Spot, Narrow, Flood beam angles
- Delivers Flicker Free Light (<1% flicker)
- Rated Lifetime (L70): 50,000 hours
- 4000 lumens at 3000K
- 92 CRI

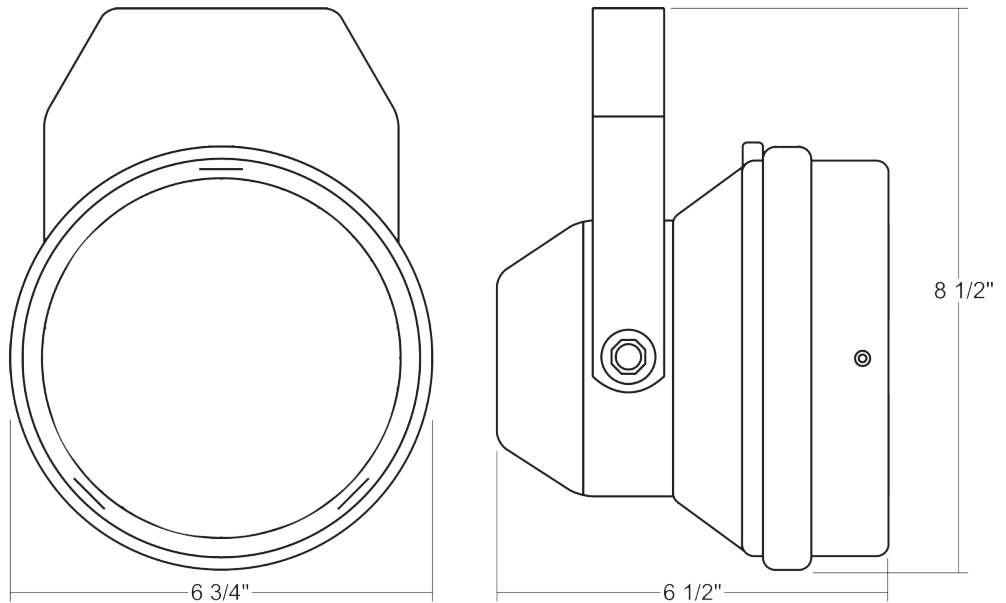

HOW TO SPECIFY:




MODEL	FINISH	COLOR TEMPERATURE
56L	B = Black W = White S = Silver CC = Custom Color	27 = 2700K 30 = 3000K
BEAM	MOUNTING	
15 = 15° 25 = 25° 40 = 40°	See Mounting Options.	

EXAMPLE: 56L - B - 27 - 15 - TA2

MODEL	FINISH	COLOR TEMPERATURE	BEAM	MOUNTING
56L				

*Specification sheets are subject to change without notice.

Photometric Data

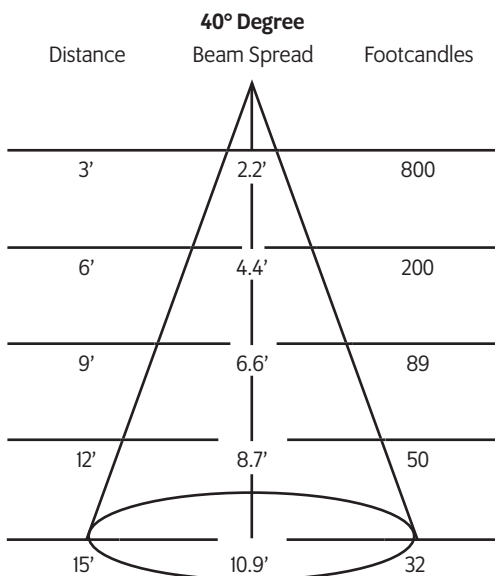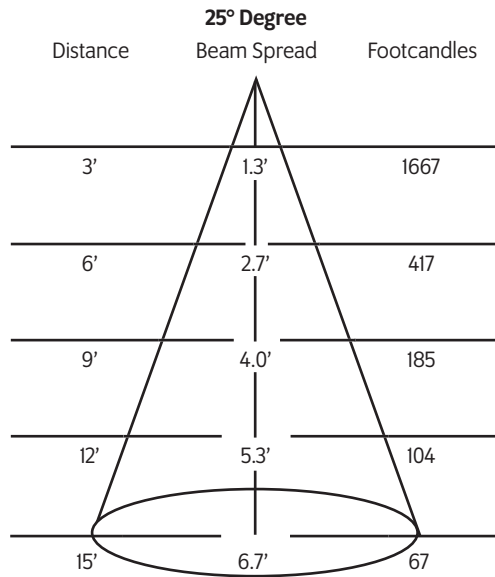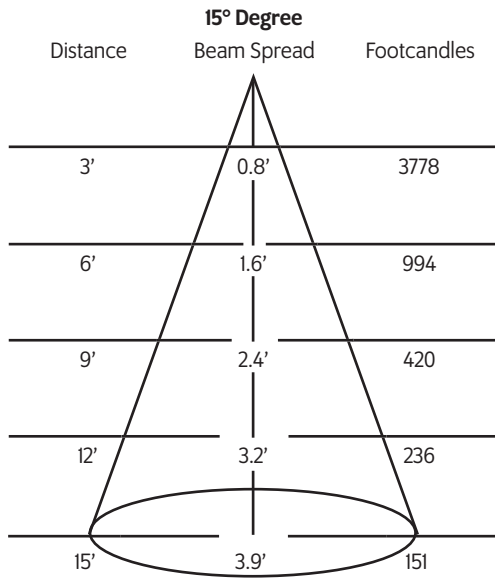

Mounting Options


T1 Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with larger, heavier fixtures.

DT2 Track adapter for SpecTrack 2-Circuit data track. 120V.

HDT2 Track adapter for SpecTrack 2-Circuit data track. 277V.

TA2 Track adapter for G-Series specification grade 2-circuit track. 120V.

TA3 Track adapter for G-Series specification grade 3-circuit track. 120V.



CM4 Canopy mount.



US1 6 5/8" x 1 1/2" Unistrut adapter.




TB4 6 1/4" Portable wall mount/table base floor, wall or table use.

TB8 8" x 8" Portable table base for floor or table use.



MN Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

PC9M Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.



Accessories

LV9	Louver
LV9BD	Louver (for use with BD9)
BD9	Barndoor
HD9	Hood
XH9	Cross Baffle Hood
CF9	Color Frame
FX9	Color Filter
GF9-600	5°x50° Linear Lens
GF9-601	Beam Softener
GF9-673	50°x50° Spread Lens
CC18	Coiled Cord
SC-24	Safety Cable

Extension Wands

SP 12	12" Stem
SP 18	18" Stem
SP 24	24" Stem
SP X	Custom Length

Finish

B	Black
W	White
S	Silver
CC	Custom Color

