

# MOSAIC WALL WASH

## Color Mixing - Tunable White

The Mosaic Wall Wash features tunable color and a high CRI output. It also features tunable white from 1650K-8000K with a CRI of 90+ across the entire temperature range. Rich blues, ambers, reds, violets and greens can be added in gradients or can completely saturate the output of the light. Interchangeable reflectors allow beam angles between 10° and 60°.

5 Holt Drive  
Stony Point, NY 10980  
845-947-3034  
www.tslight.com

### Key Features:

- 2000 Lumen Output
- 4 DMX Channels
- **Tunable range:** 1650K - 8000K tunable white.
- Mix colors such as red, amber, mint, cyan and blue, plus green if an expanded gamut option with saturated green is desired
- 90+ CRI
- Dimmable from 100 - 0.1% at constant CCT
- <2 MacAdam ellipse over 50,000 hour life



Manufactured in the USA - IBEW



## Power

- **Power Consumption:** 28W  
Max. Operating Temp.: 104°F (40°C) ambient
- 90 - 305 VAC, 50/60 Hz
- Do not install on a circuit containing a dimmer.
- DMX Addressing is RDM-only.

## Weight

- **Weight:** 3 lbs.

## Mounting Options

**DT2** 2-circuit track adapter for SpecTrack databus. 120V.

**HDT2** 2-circuit track adapter for SpecTrack databus. 277V.


**CM4** Canopy Mount

**US1** 6<sup>5</sup>/<sub>8</sub>" x 1<sup>1</sup>/<sub>2</sub>" Unitrut Adapter

**TB8** 8" x 8" Portable table base for floor and table use

**MC** Light duty pipe clamp for small fixtures.  
For pipes up to 1 5/16" O.D.

**MN** Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

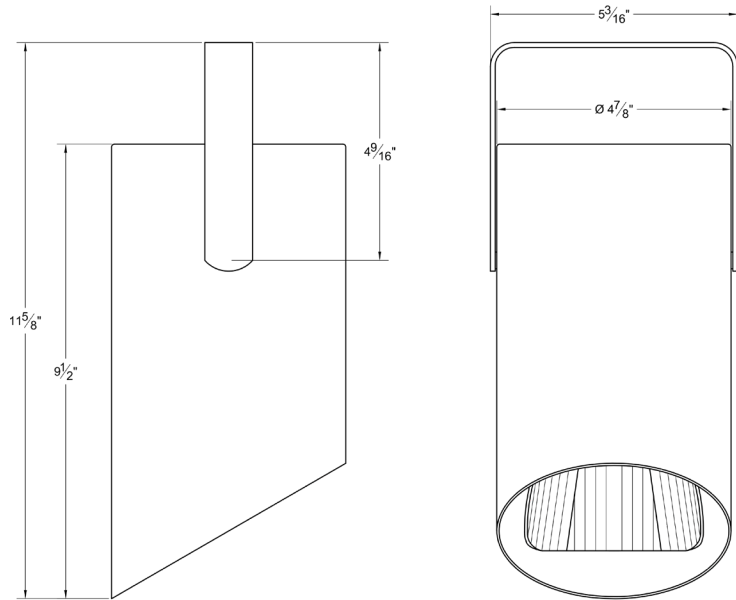

## Accessories

<b>CC18</b>	Coiled Cord
<b>SC-24</b>	Safety Cable
<b>WL</b>	Wrench Locking

## Ordering Matrix

Model	Finish	Voltage	Mounting	Dimming*
WW22-CT	B - Black W - White S - Silver CC - Custom Color	120 277	See Mounting Options	BT = Bluetooth DX = DMX / RDM

**Example:** WW22-CT-B-277-BT

WW22-CT-\_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

\* For notes on dimming, please [click here](#).

