



SB200


200W PAR46



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

The SB200 is a compact, lightweight unit that accepts 200-watt PAR46 lamps in both spot and flood designations. Features a hinged front for easy re-lamping and beam rotation. Its accessory-retaining clips accept louvers, barndoors, hoods and filters. Ideal for galleries, museums or any retail application. Available in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

Manufactured in the USA - IBEW

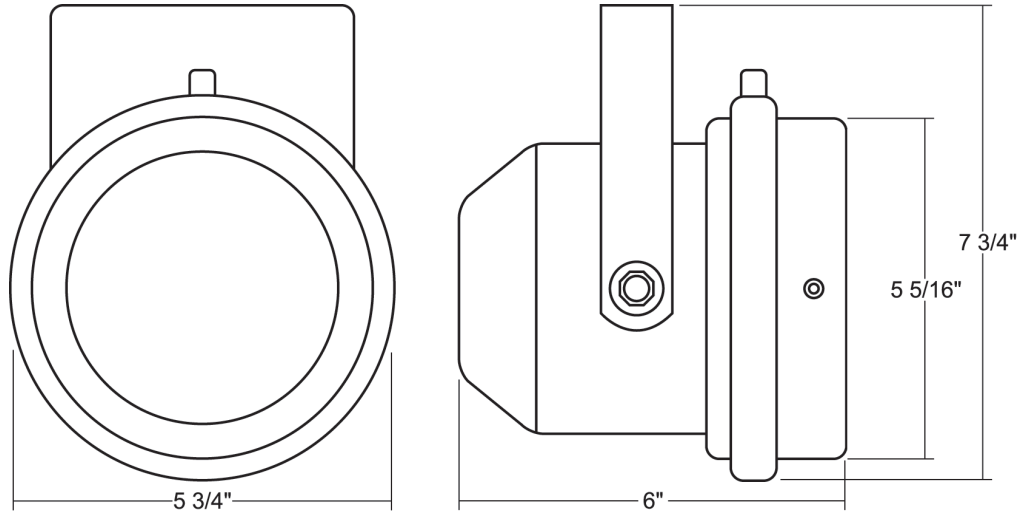

Lamp Types

200PAR46/3NSP
200PAR46/3MFL

200W; 2000Hrs; 8°x12° Beam; 31000 CBCP; 2750°K Color Temp
200W; 2000Hrs; 13°x27° Beam; 11500 CBCP; 2750°K Color Temp

Ordering Matrix


Model	Finish	Mounting	Accessories
SB200	B = Black W = White S = Silver CC = Custom Color	See Mounting Options	See Accessory Options

Example: SB200-B-T1-LV7


SB200-_____ - _____ - _____

Photometric Data

200PAR46/3NSP 8°x12°

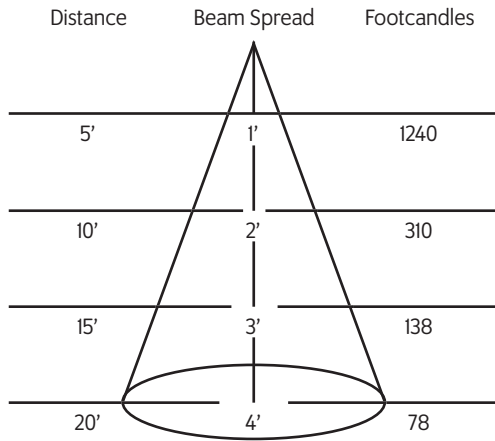

200PAR46/3MFL 13°x27°

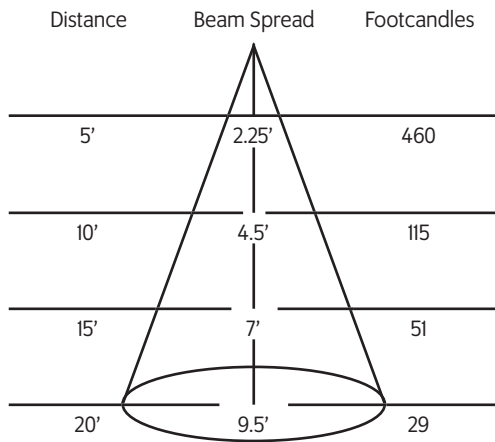

Mounting Options

AD1

Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with Lightweight fixtures.

T1

Track adapter for commercial grade 1 & 2 circuit track. 120V. For use with larger, heavier fixtures.

TA2 / HTA2 (277)

Track adapter for G-Series specification grade 2-circuit track. 120V or 277V.

TA3


Track adapter for G-Series specification grade 3-circuit track. 120V.

TA1 / TE2 (2 circuit)

Track adapter for E-Series specification grade track. 1 or 2 circuit. 120V.


ST2

2 circuit track adapter for Data Bus. Specification grade track. 120V.



CM4

Canopy mount.



US1

6 5/8" x 11/2" Unistrut adapter.



TB4

6 1/4" Portable wall mount/table base floor, wall or table use.

TB8

8" x 8" Portable table base for floor or table use.



MC

Light duty pipe clamp for small fixtures. For pipes up to 15/16" O.D.

MN

Medium duty pipe clamp for small to large fixtures. For pipes up to 2" O.D.

PC9M

Heavy duty pipe clamp for large, heavy fixtures. For pipes up to 2" O.D.



Accessories

LV7

Louver

XL7

Cross Baffle Louver

BD7

Barndoor

HD7

Hood

XH7

Cross Baffle Hood

CF7

Color Frame

GF7

Glass Color Filter

DF7

Dichroic Color Filter

GF7-600

5°x50° Linear Lens

GF7-601

Beam Softener

GF7-673

50°x50° Spread Lens

GF7-702

UV Blocking Filter

CC18

Coiled Cord

SC-24

Safety Cable

IP

Integral Dimmer

Light Blocking Screens

Stainless steel screens used singly or in combinations to block transmitted light without changing color temperature.

LBS7-20

20% Light Blocking

LBS7-30

30% Light Blocking

LBS7-40

40% Light Blocking

Extension Wands

SP 12

12" Stem

SP 18

18" Stem

SP 24

24" Stem

SP X

Custom Length

Finish

B

Black

W

White

S

Silver

CC

Custom Color

