


Times Square Lighting's 1-Circuit Track with Data Bus offers the ability to control fixtures with DMX, 010V or DALI protocol. The data can be accessed anywhere along the track.

Easily field cuttable, no cutting back or bending of conductors necessary. The track has pre-punched slotted holes for surface mount installation. Special mounting clips are available for cable and stem mounting.

TRACK SECTION



4 ft. DB 4
8 ft. DB 8
12 ft. DB 12

Add suffix B-Black, W-White, 1-Natural.
Custom lengths available.


Please consult factory.

E-Series


Specification Grade 1-Circuit Databus 120 Volt Track



5 Holt Drive,
Stony Point, NY 10980
845-947-3034
info@tslight.com

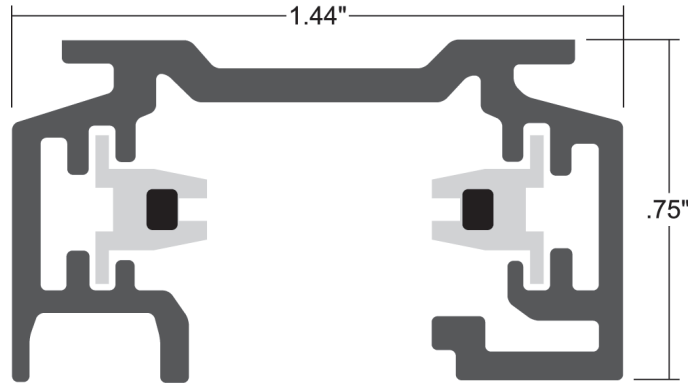


COMPONENTS *(Add suffix B-Black, W-White, S=Silver)*



**DB 11 (ground contact right)
DB 13 (ground contact left)**

Live End Feed


Used when energizing track from an outlet box or conduit feed.



**DB 11 TERM (ground contact right)
DB 13 TERM (ground contact left)**

Live End Feed


Used when energizing track from an outlet box or conduit feed.



DB 21

Center Feed


Used to join two sections of track together in a straight line. May be used as a feed point.



**DB 39 (right)
DB 40 (left)**

T Connector Feed


Used to join three sections of track in a "T" configuration. May be used as a feed point.



**DB 34 (ground contact right)
DB 35 (ground contact left)**

L Connector Feed


Used to join two sections of track together at a 90° angle. May be used as a feed point.



DB 38

X Connector Feed

Used to join four sections of track together in an "X" configuration. May be used as a feed point.



DB 36

Flex Connector

Used to join two sections of track together to create angles from 0° to 180°. Can be flexed on horizontal or vertical planes.



SG 41

End Caps


Used to end any open configuration of track.



XTSAJ 10

Conduit Adapter


Used to attached power to any live feed.



GES 15

J-Box Cover

Used to cover an outlet box.



99-542 TERM



Retrofit Terminating Resistor

Used to terminate DMX configuration.


PENDANT MOUNT (Add suffix B-Black, W-White, S=Silver)

3/8" Stem and canopy kit for mechanical and electrical suspension. Does not include mounting hardware to attach stem to track - order separately. Custom lengths available.


Length	Model #
12 in.	SPUS 12
18 in.	SPUS 18
24 in.	SPUS 24
36 in.	SPUS 36
48 in.	SPUS 48

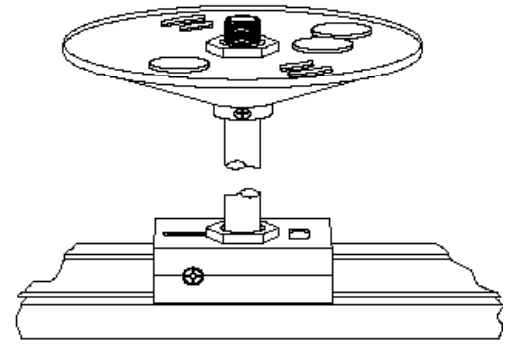

SGM2
2" Pendant Clip
For pendant mounting with aircraft cables or 3/8" stem.



SGM4
4" Pendant Clip
For positioning over end feed. For aircraft cable or 3/8" stem mounting. Can be used for electrical connection to the track.



SKBX 12
Grid mounting clip.

CABLE MOUNT (Add suffix B-Black, W-White, S=Silver)

Cable kit with canopy. Custom lengths are available.

Length	Model #
24 in.	CG 24
36 in.	CG 48
72 in.	CG 72

