

Job Name: Fixture Type: Qty:

Metal Halide by Times Square Lighting

CT639 39W T6




These specification grade fixtures are designed for use with the energy efficient T6 metal halide lamp. An interchangeable flood or spot reflector is available for these units making them ideal for retail, display and exhibit environments where a long life energy efficient light source is required.

Features include machined aluminum ballast housing and spun steel lamp housing, an internal accessory holder accepts louvers, barndoors, hoods and a wide variety of filters. Other features include an electronic ballast, adjustable self-locking head and hinged front for easy re-lamping. Available in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

Features:

- 120 and 277-volt available
- Accepts T6 metal halide lamps
- Energy efficient
- Long lamp life
- Interchangeable reflectors available in 17° and 36°
- Electronic Ballast
- Numerous mounting options and accessories

Manufactured in the USA - IBEW

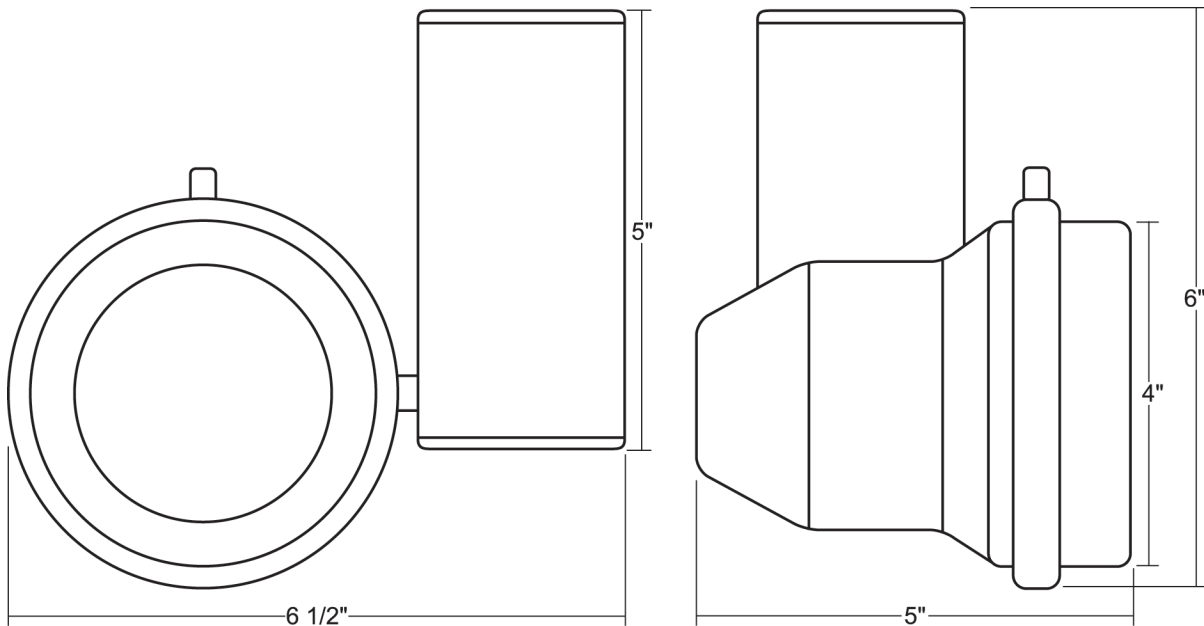


Last updated 03/05/2013.

Specify: CT639 - - - -


	MODEL NUMBER	FINISH	REFLECTOR	MOUNTING (optional)	ACCESSORIES (optional)
Example:	CT639	-B	-SP or FL	-T1	-LV6

Photometric Data

39W T6 MH Spot Reflector

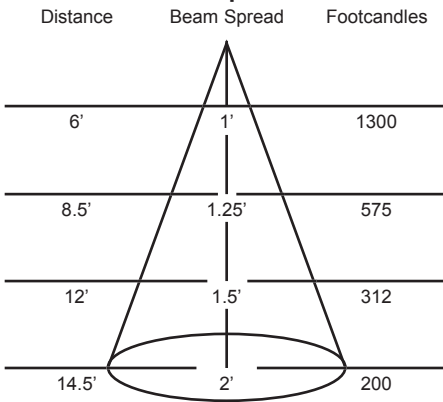

39W T6 MH Flood Reflector

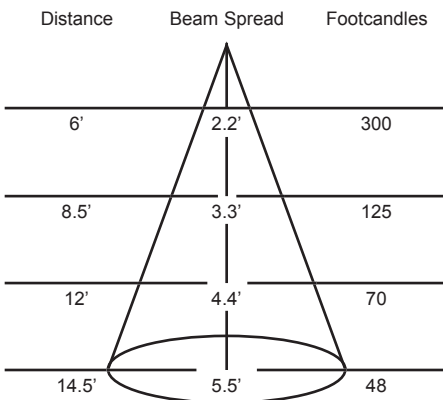

Osram Powerball

MC39T6/U/G12/830 PB 35W Clear; 8000Hrs; 3400 Lumens; 85 CRI; 3000°K Color Temp

Lamp Types

CDM35/T6/830 39W Clear; 12000Hrs; 3400 Lumens; 81 CRI; 3000°K Color Temp

Reflector

SP 17° Spot
FL 36° Flood

Mounting Options

- AD1**
Track adapter for commercial grade 1 and 2-circuit track.
- T1**
Track adapter for commercial grade 1 and 2-circuit track.
- TA1**
Track adapter for E-Series specification grade 1-circuit track.
- TE2**
Track adapter for E-Series specification grade 2-circuit track.
- TA2**
Track adapter for G-Series specification grade 2-circuit track.
- HTA2**
Track adapter for G-Series specification grade 2-circuit 277-volt track.
- TA3**
Track adapter for G-Series specification grade 3-circuit track.
- US1**
Unistrut adapter.
- MC**
Medium duty pipe clamp for pipes up to 1 1/2" O.D.
- MN**
Medium duty pipe clamp for pipes up to 2" O.D.

CM4
6" Canopy for permanent mounting on standard 4" octagonal outlet boxes.

Accessories

- LV6 Louver
- XL6 Cross Baffle Louver
- BD10 Barndoor
- HD6 Hood
- XH6 Cross Baffle Hood
- GF10 Glass Color Filter
- DF10 Dichroic Color Filter
- GF10-600 5°x50° Linear Lens
- GF10-601 Beam Softener
- GF10-673 50°x50° Spread Lens
- GF10-702 UV Blocking Filter
- CC18 Coiled Cord
- SC-24 Safety Cable

Light Blocking Screens

Stainless steel screens used singly or in combinations to block transmitted light without changing color temperature.

LBS10-20	20% Light Blocking
LBS10-30	30% Light Blocking
LBS10-40	40% Light Blocking

Finish

B	Black
W	White
S	Silver
CC	Custom Color