

Job Name: Fixture Type: Qty:

Line Voltage by Times Square Lighting



F30 50-75W PAR30


The F30 is a compact, theatrical style unit designed for Halogen Performance Plus PAR30 lamps. Available in 50, 60 and 75-watts, these lamps come in a variety of beam spreads ranging from 9 to 35 degrees.

The F30 is ideal for lighting small stages, displays and exhibit booths. Equipped with an internal accessory holder that accepts louvers and filters. Available in standard black, white and silver finishes. Custom colors are available by request and at an additional charge.

Features:

- Theatrical design
- 6' cord and u-ground plug
- Accepts 50, 60 and 75-watt PAR30 lamps
- Numerous mounting options and accessories

Manufactured in the USA - IBEW



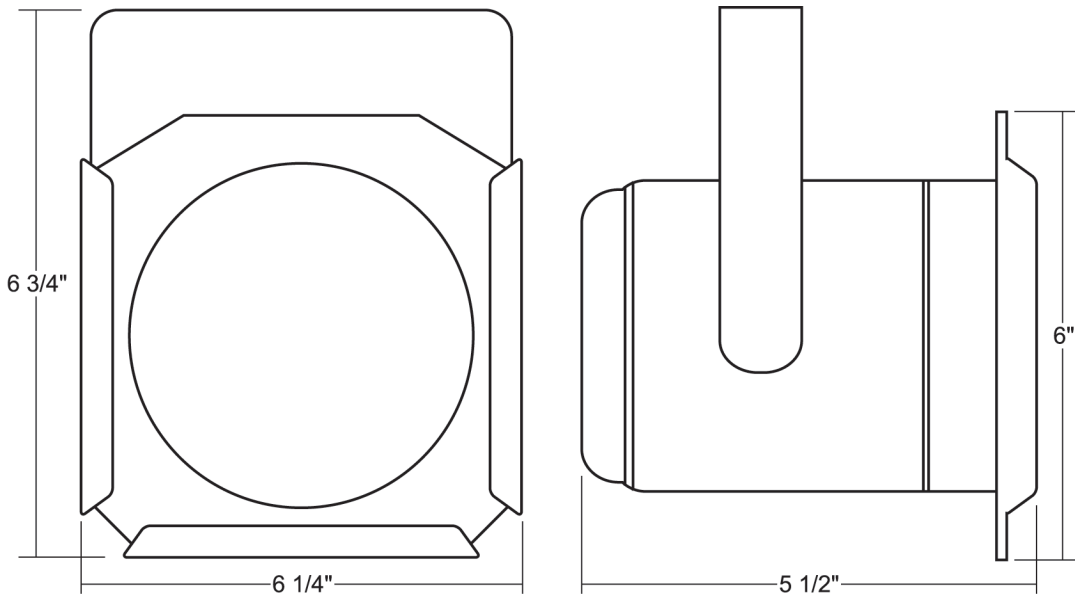


Last updated 07/26/2012.

Specify: F30 - - -

	MODEL NUMBER	FINISH	MOUNTING (optional)	ACCESSORIES (optional)
Example:	F30	-B	-T1	-LV17

Photometric Data

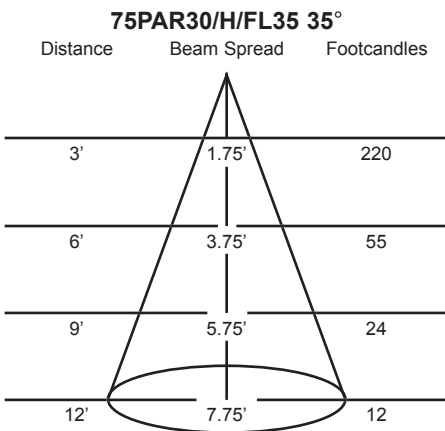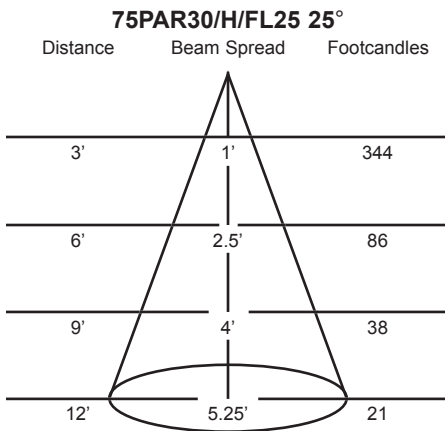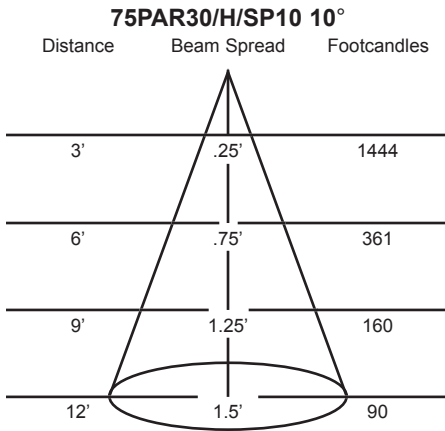

Lamp Types

- 50PAR30/HIR/SP9** 50W; 3000Hrs; 9° Beam; 13000 CBCP; 2810°K Color Temp
- 50PAR30/HIR/FL25** 50W; 3000Hrs; 25° Beam; 2700 CBCP; 2810°K Color Temp
- 50PAR30/HIR/FL35** 50W; 3000Hrs; 35° Beam; 1500 CBCP; 2810°K Color Temp
- 60PAR30/H/SP10** 60W; 3000Hrs; 10° Beam; 10000 CBCP; 2800°K Color Temp
- 60PAR30/H/FL25** 60W; 3000Hrs; 25° Beam; 2400 CBCP; 2800°K Color Temp
- 60PAR30/H/FL35** 60W; 3000Hrs; 35° Beam; 1700 CBCP; 2800°K Color Temp
- 75PAR30/H/SP10** 75W; 3000Hrs; 10° Beam; 13000 CBCP; 2830°K Color Temp
- 75PAR30/H/FL25** 75W; 3000Hrs; 25° Beam; 3100 CBCP; 2830°K Color Temp
- 75PAR30/H/FL35** 75W; 3000Hrs; 35° Beam; 2000 CBCP; 2830°K Color Temp

Accessories

LV17	Louver
BD12	Barndoor
CF17	Color Frame
GF17	Glass Color Filter
DF17	Dichroic Color Filter
GF17-600	5°x50° Linear Lens
GF17-601	Beam Softener
GF17-673	50°x50° Spread Lens
GF17-703	UV Blocking Filter
CC18	Coiled Cord
SC-24	Safety Cable
DM	Integral Dimmer

Finish

B	Black
W	White
S	Silver
CC	Custom Color

Male Connectors

E2867	Edison Plug (included)
E876	Twist Lock
600G	Stage Pin

Mounting Options

US1

Unistrut adapter.

MC

Medium duty pipe clamp for pipes up to 1 1/2" O.D.

MN

Medium duty pipe clamp for pipes up to 2" O.D.

PC9M

Heavy duty pipe clamp for pipes up to 2" O.D.

TB4

6" Portable wall mount/table base for floor, wall or table use.